


BaseLine 24

24-Pole Heavy Duty Industrial Connector · IP65 ·
Plastic Lever · Metric Entry

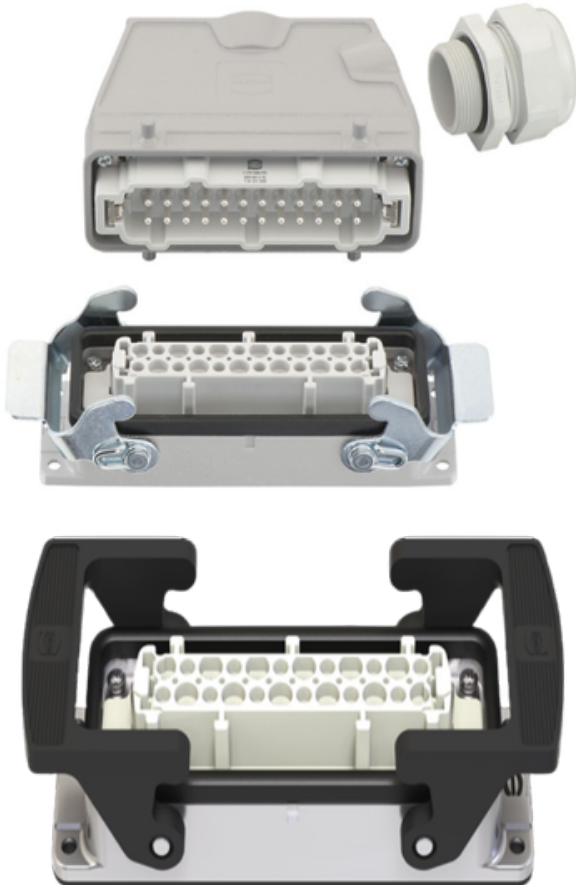

Technical Specifications

Contacts	24 + PE
Rated Current	16 A
Rated Voltage	500 V (600 V UL/CSA)
Impulse Voltage	6 kV / Overvoltage Cat. 3
Wire Gauge	0.75 – 2.5 mm ² (AWG 18–14)
Stripping Length	7.5 mm
Cable Entry	M32 Metric
IP Rating	IP 65 (IEC / EN 60 529)
Housing Material	Die-cast Aluminium, RAL 7036
Lever Type	Plastic / Metal (variant)
Standard	DIN EN 61 984 · VDE 0627
Certifications	UL / CSA · EN ISO 9001

Ordering Information — Part Numbers

Metric Cable Entry / Plastic Lever	97 00 000 5454
Metric Cable Entry / Metal Lever	97 00 000 3901
Pg21 Cable Entry / Metal Lever	97 00 000 4289
Pg21 Cable Entry / Plastic Lever	97 00 000 5458

Note: All connectors rated 16 A / 500 V / 6 kV impulse. Not to be coupled/decoupled under electrical load. Housing: Die-cast aluminium RAL 7036. Certified EN ISO 9001.

OMKAR SYSTEMS

Authorized Distributor · Est. 2009

2/107, Rajashree Industrial Estate,
Opp. Varun Garden, Manpada,
Thane (W) - 400607, Maharashtra, India

CONTACT US

Ph: +91 89762 98422 | +91 89765 61809

Email: enquiry@omkarsystems.net
sales@omkarsystems.net

Web: www.omkarsystems.net